



Gas Insulated Substation Testing and Applications

Course Number: EE-04-946

PDH: 4

Approved for: AK, AL, AR, DC, DE, FL, GA, IA, ID, IL, IN, KS, KY, LA, MD, ME, MI, MN, MO, MS, MT, NC, ND, NH, NJ, NM, NV, NY, OH, OK, OR, PA, SC, SD, TN, TX, UT, VA, VT, WI, WV, and WY

State Board Approvals

Florida Provider # 0009553 License #868

Indiana Continuing Education Provider #CE21800088

Maryland Approved Provider of Continuing Professional Competency

New Jersey Professional Competency Approval #24GP00025600

North Carolina Approved Sponsor #S-0695

NYSED Sponsor #274

Course Author: Velmir Lackovic

How Our Written Courses Work

This document is the course text. You may review this material at your leisure before or after you purchase the course.

After the course has been purchased, review the technical material and then complete the quiz at your convenience.

A Certificate of Completion is available once you pass the exam (70% or greater).

If a passing grade is not obtained, you may take the quiz as many times as necessary until a passing grade is obtained).

If you have any questions or technical difficulties, please call (508) 298-4787 or email us at admin@PDH Pro.com.



Gas Insulated Substation Testing and Applications

To provide the function and safety the GIS installation for which it was designed, the GIS has to be tested. The testing procedure is done to confirm the technical information as well as safe operation of the GIS installation over its life duration. Related to the GIS installation use, the main tests are dielectric tests, short-circuit tests, mechanical tests, and temperature rise tests.

Two different test processes are used: type tests that are also known as design tests, and routine tests, that are known as factory or production tests. While type tests confirm the functions of one GIS type after product development, routine tests check that each manufactured item functions according to the technical demands to which the GIS installation is supposed to adhere.

Type Tests

Once of the crucial steps in development of GIS equipment are type tests. They are done to check the performance of the GIS equipment. The ratings defined in the type tests will also be declared as default data when the GIS equipment is in the production cycle. Type tests at least include:

- Measurement of the resistance of the main circuits
- Tightness tests
- Temperature rise checks
- Short-time withstand current and peak withstand current tests
- Dielectric checks
- Electromagnetic compatibility (EMC) test
- Check of the degree of protection of the enclosure

- Switch operating mechanical life tests
- Check of making and breaking capacities
- Verifications to check performance under thermal cycling and gas tightness tests on insulators
- Proof tests for enclosures
- Low and high temperature verifications
- Pressure test on partitions
- Fault-making capability of high speed earthing switch
- Circuit breaker design tests

The following paragraphs present some of the tests.

Dielectric Tests

Dielectric tests are done to check the dielectric capability of the GIS installation under all foreseeable operating circumstances, including temporary and transient over-voltages, and hence involve power frequency verifications, lightning impulse checks, switching impulse checks, partial discharge verifications, and tests on auxiliary and control circuits. In Table 1, an overview of the various dielectric tests presented. The high voltage tests need a big size of test equipment to create the test voltages of some thousands or millions of volts.

Resistance Measurement of the Main Circuits

This test assesses the resistance of a set of conduction paths in a GIS installation. The test will show the conductivity of conductor material, conductor connections, and associated contacts. At a current of generally 100 A DC, the resistance or voltage drop of specified arrangements will be measured. The test results provide information about the conductor quality connections and contacts and also give a basis for a cross comparison between the three phases. The lower the resistance values, the lower the temperature rise would be when in operation. The temperature rise is crucial factor for checking the continuous current capability of the product. The test results make a benchmark for the GIS test later during manufacturing process.

Table 1. Dielectric tests

Dielectric tests				
Power frequency tests	Lighting impulse tests	Switching impulse tests	Partial discharge tests	Tests on aux. & control circuits
Simulating conditions under operating frequency	Assessing atmospheric overvoltage	Assessing over-voltages caused by switching operations	Testing to ensure that design and solid insulation is free of partial discharges	Checking that the insulation of aux. & control circuits withstands the dielectric conditions
Primary equipment				Secondary equipment

Temperature Rise Tests

To determine at what maximum continuous current the GIS equipment can be operated, a temperature rise test is done. Thermocouples will be installed at different locations such as conductors, connections, contacts, and insulators to assess the temperature rise at a defined continuous current the GIS equipment is made for. Other than this discrete measure technique, by using thermocouples extra thermographic measures can be implemented to support the evaluation of the arrangement related to the temperature rise, particularly during development tests.

Short-Time Withstand Current and Peak Withstand Current Tests

This test is for verification that main circuits of the GIS installation will be able to conduct the peak withstand current and the rated short-time withstand current. Elements of the main circuit as well as support insulators need to withstand the dynamical stress during the short-time withstand current and the peak withstand current that the GIS installation has to conduct in the closed position of the circuit breaker and disconnect switches. Common values of the short-circuit duration are 1 s or 3 s. With a time duration of 45 ms and for a frequency of 60 Hz the value of the peak withstand current is 2.6 times the rated short-time withstand current. The short-circuit verifications demand high currents, which are created in big, special generators. In some situations, the short-circuit current is taken from the electrical network, but as this might cause disturbances in the network it is usually prohibited.

Tightness Verifications

Tightness tests verify that the SF₆ leakage rate of the tested GIS equipment does not surpass a predetermined value of a permissible leakage rate. According to GIS IEEE and IEC standards the leakage rate must not surpass 0.5% per year per gas compartment. Certain GIS manufactures claim even leakage rates of 0.1% per year per gas compartment.

Low and High Temperature Verifications

This verification is part of the mechanical and environmental tests. All GIS components must work under predetermined low and high temperature conditions. The GIS or elements of the GIS will be installed in a climate chamber. At minimum and maximum temperatures, operation verifications will be done. After the test cycles, the SF₆ gas pressure and the SF₆ leakage rate over a period of 24 hours will be checked.

Proof Verifications for GIS Enclosures

Proof verifications of the enclosures can be destructive or non-destructive. The graph in Figure 1 presents the type test pressure as the highest pressure before the burst and rupture pressure of the enclosure. Coordination of the design and test pressure levels for the GIS enclosures is presented in Figure 1.

Circuit Breaker Design Verifications

Apart from the tests already presented, such as the dielectrical verifications and temperature rise tests, circuit breakers have to be type-tested according to their adequate operation duties.

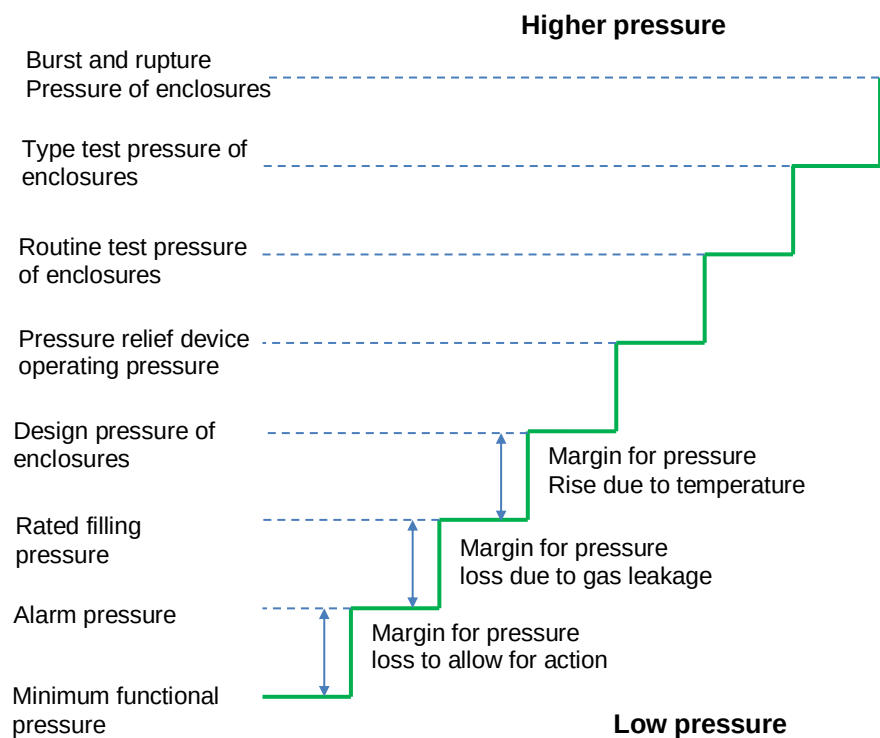


Figure 1. Pressure coordination of enclosures and pressure-relief elements



Purchase this course to
see the remainder of
the technical materials.